	T				
Dimention		No.	Quantity		
50X1.5MM	() 0 0000)	1	14		
2890MM	J				
37x1.1mm	0.	2	50		
1920mm					
50X1.5MM	0 • •	3	28		
1960MM					
25x0.8mm	0	4	7		
750mm					
25x0.8mm		5	14		
1987mm					
110 ° Three-way		7	7		
connector 54-42mm					
140 ° Three-way		8	2		
connector 54-42mm	0.00				
140 ° Four-way		9	5		
140 ° Four-way connector 54-42mm		9	3		
Connector 34-42mm					
	0.00				
110 ° Four-way		10	10		
connector 54-42mm		10	10		
20111100to1 34-42111111					
Flat Threeway		11	4		
connector 54-42mm		-			
				l	


El.4 C		10	10		
Flat fourway		12	10		
connector 54-42mm					
Foot base for corner	9.	13	2		
on right	Q /2				
	•				
Foot base for corner		14	2	 	
on left					
	0				
Foot base for	96	15	10		
sidewall	_0_0_	10			
side wan					
	· ·				
Foot base for		15	16		
		13	10		
sidewall					
T 1 11 2		17	0		
Turnbuckle set for		17	8		
side					
Turnbuckle set for		18	12		
roof					

surperpeg		19	10	???????	
6x300mm spiral	2-0	20	4		
6x180mm		21	14		
4x180mm		22	56		
Long bungeeball		23	204		
Short bungeeball	0	24	20		
rope		25	4		
hook	∠ √	26	4		
Spancer		27	1		
M6X30mm screw +nut		28	28		

M8x45mm screw		29	100		
	_				
M8x60mm screw		30	84		
locknut		31	184		
spancer	5-0	32	2		
roof	English Control of the Control of th	33	1		
sidewall		34	12		
endwall		35	2		


Select a flat ground for the tent, unpack the carton and check all the parts including tubes, tent and accessories... etc. are present as same as list.

Assemble the framework of rooftop by joining the portion (7.8.9.10.11.12.) together with poles (2.3). To ensure the screw fixed to every pole tightly

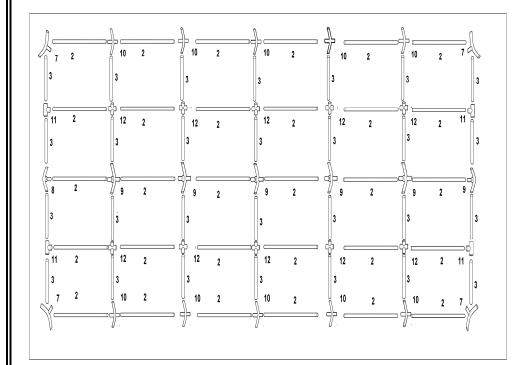


Ш

Attach one end of supported pole (4.5) to the joints (8.11)

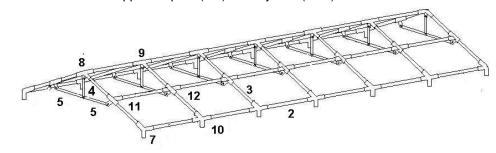


Fastening the roof by using turnbuckle set(18) which is diagonally across through each two section as below.

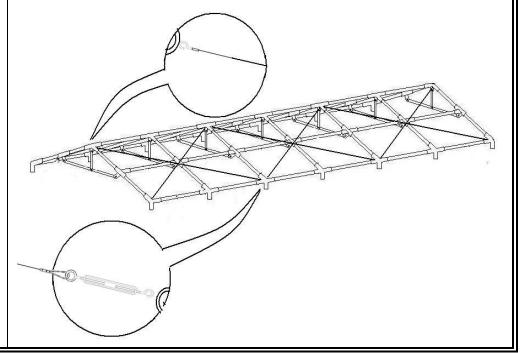


Ш

Cover the roof on the frame ,and attach it by the bungee balls properly ,take care of the tension of the bungee balls ,for if you use too many on one side of tent ,it may too tight to tie the other side of it .Leg 1 which with a hold in the middle should be on two sides.

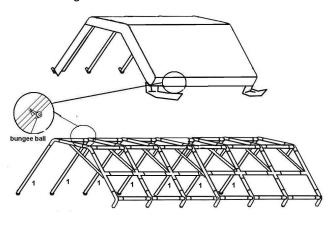


IV

Attach the another 7 supported poles (1) to the joints (7.10), built-up the framework ,use the long peg to fix each pole into the ground and use the hook to fix the leg cover to the leg .Using turnbuckle sets (17) to fasten the structure just the same as you do on roof ..

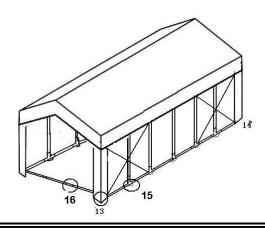


V

spread the wall panel and door panel attach to framework by using the bungee cords clasping the frame to grommets that is construct over the wall panel and door panel to ensure stability. Also use the short pegs to fix the doors to the ground.

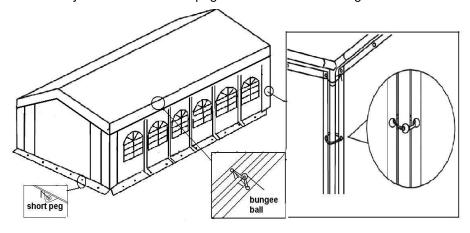

VI

The Guy lines clasp to each corner of tent and another end of line fix to ground by pegs.

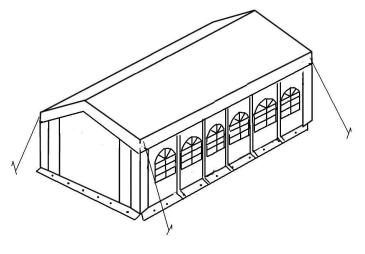

<u>. Warning</u>

- 1. In order to avoid being rusted by air ,oil is covered on the surface of the pipes ,before set up the tent ,please remove the oil carefully frist to keep the cover clean.
- 2. Take note that the tent needs to be handled carefully to avoid damage.
- 3. Do not force the frame as they may be damage in the process.
- 4. Tents are meant as temporary shelter and must be evacuated under extreme weather conditions.

Please select a suitable site for the tent to avoid the damage to underground sprinkler systems, water, gas or electrical lines.